

DuPont™
Nafion® PFSA Membranes
NRE-211 and NRE-212
Perfluorosulfonic acid polymer


Membranes

Description

DuPont™ Nafion® PFSA NRE-211 and NRE-212 membranes are non-reinforced dispersion-cast films based on Nafion® PFSA polymer, a perfluorosulfonic acid/TFE copolymer in the acid (H^+) form. Nafion® PFSA membranes are widely used for Proton Exchange Membrane (PEM) fuel cells and water electrolyzers. The membrane performs as a separator and solid electrolyte in a variety of electrochemical cells that require the membrane to selectively transport cations across the cell junction. The polymer is chemically resistant and durable.

The membrane is positioned between a backing film and a coversheet. This composite is wound on a 6 inch ID plastic core¹, with the backing film facing out, as shown in Figure 1.

Figure 1: Roll Unwind Orientation (Backing Film Facing Out)

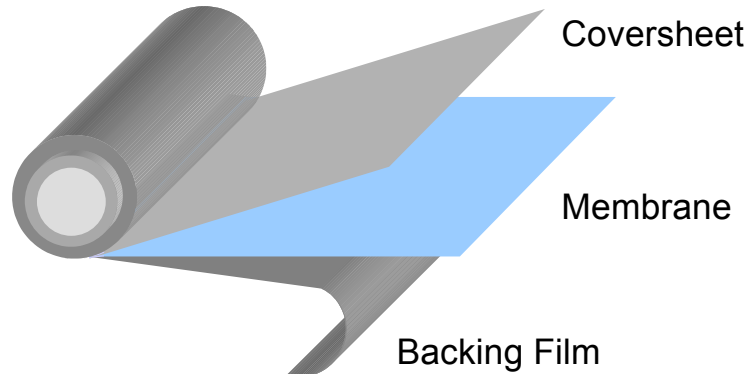

The backing film facilitates transporting the membrane into automated MEA fabrication processes, while the coversheet protects the membrane from exposure to the environment during intermediate handling and processing. In addition, the coversheet (in combination with the backing film) eliminates rapid changes in the membrane's moisture content, and stabilizes the dimensions of the membrane as it is removed from the roll.


A roll core Leader is attached to the membrane, as shown in Figure 2, when this option is specified in the purchase order. The roll core Leader material is the same as the backing film, and the length specified in the purchase order.

¹ A 6 inch ID plastic roll core is the standard. However, a 3 inch ID plastic roll core is used for roll lengths that are less than 25 meters long.



Figure 2: Splice Design

Splice Design for Attaching Roll Core Leader to Membrane

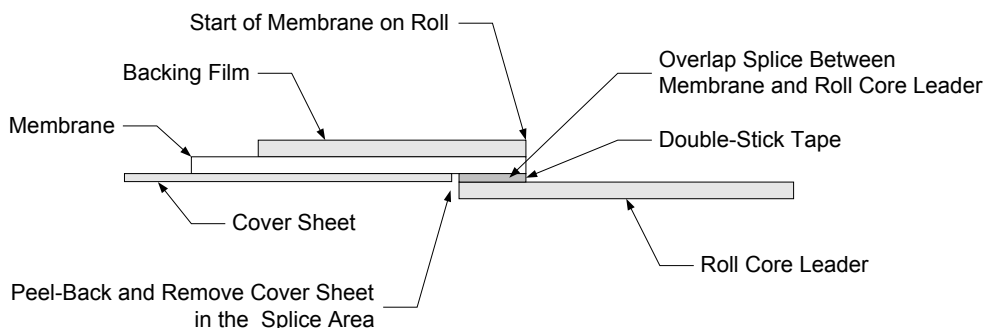

Order and Packaging Information

Nafion[®] PFSA membranes are made from standard equivalent weight Nafion[®] PFSA Polymer and available in two thickness values: NRE-211 (1-mil) and NRE-212 (2-mil).

Standard product dimensions for membrane rolls include:

Width: 12-in (305-mm) and 24-in (610-mm) standard roll widths, and intermediate widths from 200-mm (min.) up to 610-mm (max.) on special order. Intermediate widths available in increments of 0.125-in.

Length: 100-meter standard roll length, and intermediate lengths of 10-meter and 50-meter on special order

There is a 100-m² minimum order requirement for *non-standard* roll widths; and a per roll packaging surcharge for standard widths in non-standard lengths less than 100-meters. A roll core Leader is available at a nominal charge per roll. Please contact Nafion[®] Customer Service for details and availability.

Rolls are splice-free when ordered in standard 100-meter lengths. Non-standard roll lengths may contain splices under the following conditions: a 5-meter minimum distance between splices and a maximum of 3 splices per roll that is less than 100-meters in length.

The water content and conditioning of the membrane will affect its dimensions, and the change may not be symmetrical in the length, width, and thickness directions. Once the cover sheet is removed, the membrane will respond to the environmental conditions of the workplace. If the membrane remains on the backing film, the membrane's response to relative humidity conditions, for example, may cause the combination of membrane/backing film to curl. In addition, certain manufacturing steps performed by the customer also may affect the membrane's dimensions and flatness. Customers may wish to review their membrane treatment steps and dimensional requirements with a Nafion[®] Technical Representative before establishing membrane shipping dimensions.

Properties of Nafion® PFSA Membrane

A. Thickness and Basis Weight Properties¹

Membrane Type	Typical Thickness (micrometer)	Basis Weight (g/m ²)
NRE-211	25.4	50
NRE-212	50.8	100

B. Physical Properties

Property ²	Typical Values				Test Method
	NRE-211		NRE-212		
	MD	TD	MD	TD	
Physical Properties					
- measured at 50% RH, 23 °C					
Tensile Strength, max., MPa	23	28	32	32	ASTM D 882
Non-Std Modulus, MPa	288	281	266	251	ASTM D 882
Elongation to Break, %	252	311	343	352	ASTM D 882

C. Other Properties

Property	NRE-211	NRE-212	Test Method
Specific Gravity ¹	1.97	1.97	DuPont
Available Acid Capacity ³ meq/g	0.92 min.	0.92 min.	DuPont NAE305
Total Acid Capacity ⁴ meq/g	0.95 min.	0.95 min.	DuPont NAE305
Hydrogen Crossover ⁵ , (ml/min·cm ²)	< 0.020	< 0.010	DuPont

D. Hydrolytic Properties

Property	Typical Value	Test Method
Hydrolytic Properties		
Water content, % water ⁶	5.0 ± 3.0%	ASTM D 570
Water uptake, % water ⁷	50.0 ± 5.0%	ASTM D 570
Linear expansion, % increase ⁸		
from 50% RH, 23 °C to water soaked, 23 °C	10	ASTM D 756
from 50% RH, 23 °C to water soaked, 100 °C	15	ASTM D 756

¹ Measurements taken with membrane conditioned to 23 °C, 50% RH.

² Where specified, MD - machine direction, TD - transverse direction. Condition state of membrane given.

³ A base titration procedure measures the equivalents of sulfonic acid in the polymer, and used the measurements to calculate the available acid capacity of the membrane (acid form).

⁴ A base titration procedure measures the equivalents of sulfonic acid in the polymer, and used the measurements to calculate the total acid capacity or equivalent weight of the membrane (acid form).

⁵ Hydrogen crossover measured at 22 °C, 100% RH and 50-psi delta pressure. This is not a routine test.

⁶ Water content of membrane conditioned to 23 °C and 50% RH (dry weight basis).

⁷ Water uptake from dry membrane to conditioned in water at 100 °C for 1 hour (dry weight basis).

⁸ Average of MD and TD. MD expansion is similar to TD expansion for NR membranes.

Product Labeling

A self-adhesive product label, similar to Figure 3, is located on the inside of the roll core and on the outside over-wrap of each roll. The label indicates the product roll's width and length in both Metric and English units.

Figure 3: Finished Product Roll Label

Product: NRE-212	SN: D12345678
Width: 30.50 cm	Length: 100 m
Width: 12 in	Length: 328 ft
BN: G0103-1003	SEQ: 1

- **SN** is a product setup code specific to the thickness, roll width and length, and other packaging features (e.g., core leader, etc.).
- **BN** is a 2-part code, with the first part identifying the dispersion batch number, and the second part indicating the master roll number (wide-stock roll before slitting).
- **SEQ** is a sequential roll number (starting at 1, 2, 3, etc.) indicating the total number of finished rolls slit from the wide-stock master roll. The **SEQ** roll number is indicated only on the labels attached to the membrane and the roll core's ID.

The **Manufactured** date is the wide-stock roll's slit date (mm/yyyy), and is printed on the label attached to the outside of the roll's shipping box.

Recommended Roll Storage Conditions

Unopened roll packages of Nafion[®] PFSA membrane should be stored in the original shipping box, out of direct sunlight, and in a climate-controlled environment, maintained at 10 to 30°C, and 30 to 70% relative humidity. Before opening the package, pre-condition the membrane roll to the processing area temperature for 24 hours.

Once opened and exposed to the environment, the membrane will equilibrate to the ambient relative humidity, and change in dimensions accordingly. Membrane order dimensions are specified and measured at 23°C and 50% Relative Humidity.

Handling Practices

Ventilation should be provided for safe handling and processing of Nafion[®] PFSA membrane. The amount of local exhaust necessary for processing Nafion[®] PFSA membrane at elevated temperatures will depend on the combined factors of membrane quantity, temperature, and exposure time.

Scrap Disposal


Preferred disposal options are (1) recycling and (2) landfill. Incinerate only if incinerator is capable of scrubbing out hydrogen fluoride and other acidic combustion products. Treatment, storage,

transportation, and disposal must be in accordance with applicable federal, state/provincial and local regulations.

Static Discharges

The composite structure and individual layers can pick up a strong charge of static electricity because of the good dielectric properties of the Membrane, Backing Film, and Coversheet. Unless this charge is dissipated as it forms, by using ionizing radiation devices or special conducting metal tinsel, it can build to thousands of volts and discharge to people or metal equipment. In dust- or solvent-laden air, a flash fire or an explosion could follow. Extreme caution is needed to prevent static accumulation when using flammable solvents while coating membrane surfaces. Solvent-coating equipment should incorporate the means for detecting and extinguishing fire.

Separating NRE Membrane from the Coversheet and Backing Film:

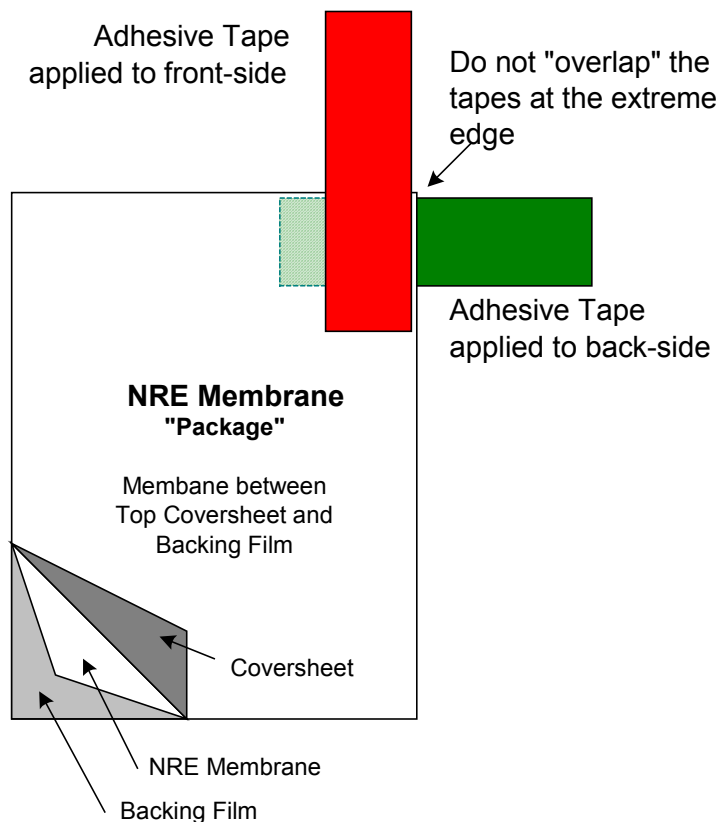

- Attach tapes to front and back sides of the NRE membrane "package" at one corner, as shown in the diagram. To prevent the tapes from sticking to each other, do not "overlap" the adhesive surfaces at the extreme edges.
- Pull the tapes apart to separate the coversheet from the membrane/backing film. The membrane typically adheres to the backing film during this step. The coversheet is 0.7-mil polypropylene film.
- Attach tapes to the membrane side and the backing film side at one corner, as shown in the diagram. To prevent the tapes from sticking to each other, do not "overlap" the adhesive surfaces at the extreme edges.
- Pull the tapes apart to separate the membrane from the backing film. The backing film is 2-mil polyester film.

Safe Handling and Use of Nafion® PFSA Membranes

The following information should be reviewed before handling and processing Nafion® PFSA Membranes:

- DuPont Material Safety Data Sheet for Nafion® PFSA Membranes NRE-211 and NRE-212
- Nafion® Technical Information "Safe Handling and Use"
- "Guide to Safe Handling of Fluoropolymer Resins", Third Edition, June 1998, Published by the Fluoropolymers Division of the Society of the Plastics Industry, Inc.

For more information about Nafion® contact:

DuPont Fluoroproducts
Nafion® Global Customer Service
22828 NC Highway 87 W
Fayetteville, NC 28306, U.S.A.

Telephone: (910) 678-1380
Domestic U.S.A. only: (800) 436-1336
Overseas: (910) 678-1337
Fax: (910) 678-1342

The DuPont Oval Logo, DuPont™, and The miracles of science™ are trademarks or registered trademarks of E. I. du Pont de Nemours and Company. **Nafion®** is a DuPont registered trademark for its brand of perfluorosulfonic acid polymer products, made and sold only by E. I. du Pont de Nemours and Company.

The data listed here fall within the normal range of product properties, but they should not be used to establish specification limits nor used alone as the basis of design. This information is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill and at their own discretion and risk. This information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, DuPont makes no warranties, express or implied, and assumes no obligation or liability in connection with any use of this information or for results obtained in reliance thereon. The disclosure of the information is not a license to operate under or a recommendation to infringe any patent of DuPont or others.

Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, see "DuPont Medical Caution Statement", H-50102.



The miracles of science™